

TESTING SEAL CAPACITY FOR CARBON STORAGE - AN EXPERIMENTAL APPROACH – (PART II)

Ralf J. Weger, Peter K. Swart, and Gregor P. Eberli

PROJECT OBJECTIVES

- Re-Design an experimental set-up that allows for CO₂-Brine saturation prior to CO₂ injection.
- Evaluate how the pre saturated CO₂-Brine mixture alters the seal capacity of mixed carbonate-siliciclastic samples.
- Run experiments to assess the amount of dissolution and possible breach of samples.

PROJECT RATIONALE

Carbon Capture Utilization and Storage (CCUS) will be a crucial component in reducing global CO₂ emissions in the coming years. Although the utilization of the captured CO₂ is an important component, it is likely that carbon capture with permanent storage will play a more important role in achieving faster, large-scale reduction of CO₂ emissions. Permanent storage requires natural reservoirs with a seal that resists dissolution by CO₂ saturated fluids. Many theoretical modeling studies dealing with such rock-fluid interactions have been published in recent years (André et al., 2007; Gaus et al., 2005; Yuan et al., 2019; amongst many others) but actual laboratory experiments are rare. Luquot and Gouze (2009) have shown that CO₂ injection triggered dissolution increased permeability, while inducing only minimal modification of porosity.

Changes in elastic properties resulting from the removal of the smaller particles (i.e., those with highest surface area), the creation of pits of dissolution on the grain surfaces, and changes at grain contacts such as grain welding caused by injection of CO₂ saturated solution have been reported by Vialle and Vanorio (2011).

This project aims to contribute to the experimental side of rock fluid interaction for carbon storage by building on our past precipitation/dissolution experiments in carbonate rocks (Weger et al., 2012), addressing the potential changes in the seal rocks resulting from CO₂ injections.

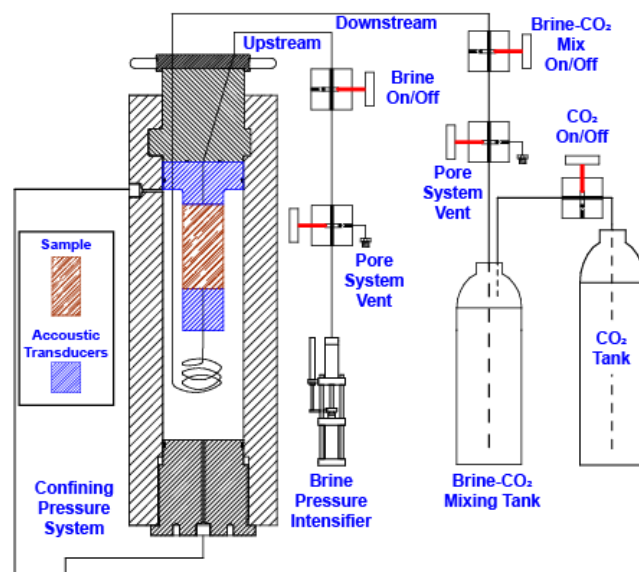


Figure 1: Set-up of proposed dissolution experiments using the Autolab 1000 which allows for pre-CO₂-Brine saturation.

WORK PROPOSED

Phase 2 of the project is the design and testing of the experimental setup. The following workflow will be tested first on various rock samples in our New England Research Autolab 1000 system. We will be using a semi-closed system where pore fluid with a predetermined geochemical composition is emplaced in the sample, CO₂ pressure is then established, and only the existing fluid volume within the intensifiers (~5-10 pore volumes of the sample) will be used to create fluid flow within the sample. This limited fluid injection will ensure that any chemical reaction of the fluid with the rock proceeds before the system reaches equilibrium with the host and the chemical reaction halts.

Monitoring of possible reactions that result in dissolution or mineralogy changes is a crucial element of the experiment. We plan to monitor physical changes with time series measurements of velocity. For this, the upstream pore fluid connection is closed. Five MPa pore pressure is installed at 60 MPa confining pressure, resulting in 55 MPa Ep. Time series measurement of VP and VS will be conducted for 72 hours (3 days) taking an acoustic measurement each hour.

After each three-day reaction time, the pore fluid will be extracted and chemically analyzed. In addition, all samples will be documented using SEM and CT scans before and after the experiment.

SIGNIFICANCE

This work will improve our understanding of how rock-fluid interaction changes microstructure and its elastic properties when CO₂ enriched fluids are injected in rocks with seal capacity. The proposed equipment re-design is expected to produce better results than the previously used method. The quantification and high resolution image documentation of the resulting rock alterations will further enhance our understanding of the rate of changes resulting from CO₂ injection.

REFERENCES

- André, L., Audigane, P., Azaroual, M. and Menjz, A., 2007. Numerical modeling of fluid-rock chemical interactions at the supercritical CO₂-liquid interface during CO₂ injection into a carbonate reservoir, the Dogger aquifer (Paris Basin, France). *Energy conversion and management*, 48(6): 1782-1797.
- Gaus, I., Azaroual, M. and Czernichowski-Lauriol, I., 2005. Reactive transport modelling of the impact of CO₂ injection on the clayey cap rock at Sleipner (North Sea). *Chemical Geology*, 217(3-4): 319-337.
- Luquot, L. and Gouze, P., 2009. Experimental determination of porosity and permeability changes induced by injection of CO₂ into carbonate rocks. *Chemical Geology*, 265(1-2): 148-159.
- Vialle, S. and Vanorio, T., 2011. Laboratory measurements of elastic properties of carbonate rocks during injection of reactive CO₂-saturated water. *Geophysical Research Letters*, 38(1).
- Yuan, T., Wei, C., Zhang, C.-S. and Qin, G., 2019. A numerical simulator for modeling the coupling processes of subsurface fluid flow and reactive transport processes in fractured carbonate rocks. *Water*, 11(10): 1957.
- Weger, R.J., Swart, P.K., Eberli, G.P. and Knackstedt, M., 2012. Rock Fluid Interaction: How Dissolution Induced Changes in Pore Structure Affect Acoustic Velocity. *CSL Annual Review Meeting*, Miami, p. 30-33.